




100 WATT SINGLE & DUAL OUTPUT

**Regulated,
2:1 Input Range
DC/DC Converters**

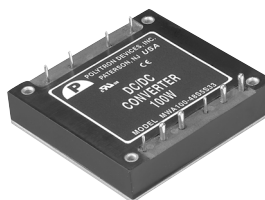

Specifications

All specifications are typical at nominal input, full load and 25°C, unless otherwise noted.

INPUT

Input Voltages Range36 - 72Vdc	
UVLO Start-up Voltage	Single.....34V typ.	Dual.....35V typ.
UVLO Shutdown Voltage	Single.....32V typ.	Dual.....33V typ.
Input Filter (Note 3)L-C type	
Input Voltage Variation dv/dt5V/ms, max. (Complies with ETS300 132 part 4.4)	
Input Surge Voltage 100ms max. (Single)100Vdc	
Start up time	Nominal Vin and constant resistor loadSingle.....25ms typ.	
Input Reflected Ripple Current (5Hz to 20MHz, 12µH source impedance)Single.....20mA p-p	
Remote ON/OFF (Note 4)	Single (Positive Logic)ON=Open or 3.5V<V _r <15V, I _{IN} =50µA max.OFF=Short or 0V<V _r <1.2V, I _{IN} =1mA max.
	Single (Negative Logic).....ON=Short or 0V<V _r <1.2V, I _{IN} =1mA max.OFF=Open or 3.5V<V _r <15V, I _{IN} =50µA max.
	Dual (Positive Logic).....ON=Open or 3V<V _r <+VinOFF=Short or 0V<V _r <1.2V
	Dual (Negative Logic)ON=Open or 3V<V _r <+VinOFF=Open or 0V<V _r <1.2V

OUTPUT

Output PowerTotal output power100 Watts max.	
Voltage Accuracy	Full load and nominal Vin.....Single.....±1.5%	Dual.....±1.0%
Voltage Adjustability	Single (Note 1).....±10%, -20%	Dual for Each Outputs.....±10%
Minimum Load0%	
Line RegulationLL to HL at FL.....See Table	
Load Regulation	Single (0% to 100% FL)	Dual (0% to 100% FL)See Table
Dual for Each OutputsSee Table	
Remote sense (Note 1)Single10% of Vout	
Ripple and Noise20 MHz bandwidth (Note 2).....100mVp-p	
Temperature Coefficient±0.02%/°C, max.	
Transient Response Recovery Time 25% load step change200µS	
Over Voltage Protection Threshold	Single (Hiccup).....115%-130% of Vout	Dual 2.5V.....3.0V 3.3V.....3.9V 5V.....6.2V
Over Current Protection ThresholdSingle.....110%-140% of Iout Rated	
Short Circuit ProtectionHiccup, automatic recovery	

GENERAL

EfficiencySee Table	
Isolation Voltage	Input to Output.....1600 Vdc, min.	Input to Case.....1000 Vdc, min.
Output to Case.....1000 Vdc, min.	
Isolation Resistance	Single.....10 ⁷ Ohms, min.	Dual.....10 ⁸ Ohms, min.
Isolation Capacitance	Single.....2500pF, max.	Dual.....1500pF, max.
Switching Frequency300 KHz, typ	
ApprovalsIEC60950, UL60950, EN60950	
Case MaterialDual.....Non-conductive black plastic	
Base MaterialAluminum base-plate	
Potting MaterialDual.....Silicon (UL94-V0)	
Weight	Single.....55g (1.94 oz)	Dual.....105g (3.7 oz)
MTBF (Note 5)	Single.....2 x 10 ⁶ hrs	Dual.....1.004 x 10 ⁶ hrs

ENVIRONMENTAL

Operating Base-Plate Temperature Range (Note 6)-40°C to +100°C	
Over Temperature Protection	Single.....110°C	Dual for base plate.....105°C
Humidity max, Non-condensing95%	
Storage Temperature Range-55°C to +125°C	
Thermal ShockMIL-STD-810D	
Vibration10-55Hz, 2G, 3 minutes period, 30 minutes along X, Y and Z	

EMC CHARACTERISTICS

Conducted emissions	EN55022 (Note 7)	Level A
	EN55022 (Note 7)	Level B
Radiated emissions	EN55022	Level A
ESD (single)	EN61000-4-2	Perf. Criteria2
Radiated immunity	EN61000-4-3	Perf. Criteria2
Fast transient	EN61000-4-4	Perf. Criteria2
Surge	EN61000-4-5	Perf. Criteria2
Conducted immunity	EN61000-4-6	Perf. Criteria2

FEATURES

- Input/Output Isolation (1600Vdc Min)
- Wide Input Voltage Range
- Industry Standard Footprint
- Compact 2.40" x 2.28" x 0.50"
- Adjustable Output Voltage
- No Minimum Load
- High Efficiency (Up to 90%)
- Short Circuit Protection
- Over Voltage Protection
- On/Off Control

MWA100 Series



Selection Guide

(Continued)

	Input Voltage Nominal (Range) (Vdc)	Output Voltage (Vdc)	Output Current (A)	Efficiency %	Model Number	Case
SINGLE OUTPUT VOLTAGE	48 (36-72)	1.8	25	86	MWA100-48S1.8	H
		2.5	25	87	MWA100-48S2.5	H
		3.3	25	90	MWA100-48S33	H
		5	20	90	MWA100-48S5	H
		15	6.66	90	MWA100-48S15	H
DUAL OUTPUT VOLTAGE	48 (36-72)	5/3.3	20/25	87	MWA100-48S5S33	H
		5/2.5	20/25	85	MWA100-48S5S2.5	H
		3.3/2.5	25/25	85	MWA100-48S33S2.5	H

Mechanical Specifications / Single Output

PIN CONNECTION		
PIN	DEFINE	Diameter
1	-INPUT	0.04 Inches
2	CASE	0.04 Inches
3	CTRL	0.04 Inches
4	+INPUT	0.04 Inches
5	-OUTPUT	0.08 Inches
6	-SENSE	0.04 Inches
7	TRIM	0.04 Inches
8	+SENSE	0.04 Inches
9	+OUTPUT	0.08 Inches

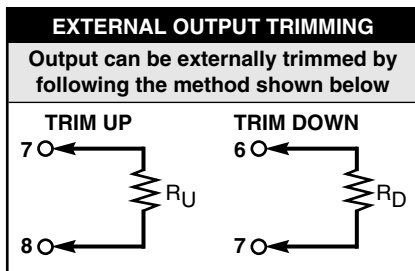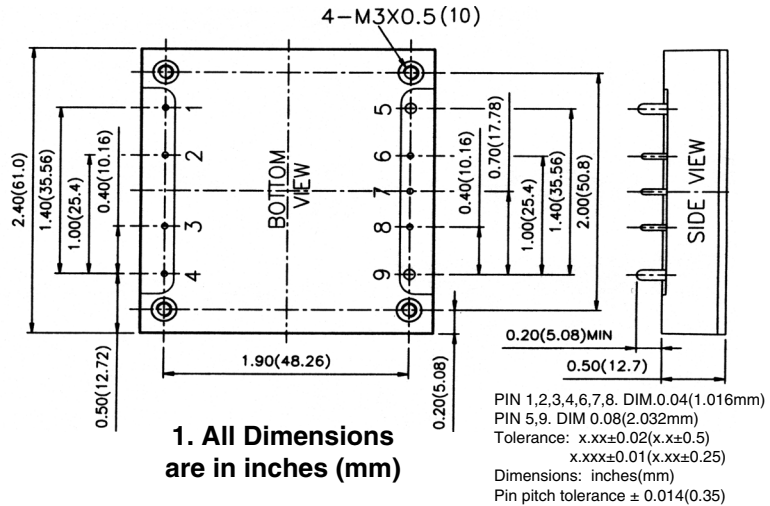

PRODUCT OPTIONS TABLE
OPTION
Negative remote ON/OFF logic, 0.20" pin length (standard)
Negative remote ON/OFF logic, 0.145" pin length
Negative remote ON/OFF logic, 0.11" pin length
Positive remote ON/OFF logic, 0.20" pin length
Positive remote ON/OFF logic, 0.145" pin length
Positive remote ON/OFF logic, 0.11" pin length

NOTE:

- Maximum output deviation is 10% inclusive of remote sense. If remote sense is not being used, the +Vsense should be connected to its corresponding +OUTPUT and likewise the -sense should be connected to its corresponding -OUTPUT.
- Single: Measured with a 1µF M/C and a 10µF T/C. Dual: For each outputs.
- An external filter capacitor is required for normal operation. The capacitor should be capable of handling 1A ripple current for 48V models. Suggest: Nippon chemi-con KMF series, 220µ F/100V, ESR 90mΩ.
- Single: The negative / positive logic and pin length are optional (see table). The pin voltage is referenced to negative input. Dual: The ON/OFF control function. There are positive logic (standard) and negative logic (option). The pin voltage is referenced to negative input. To order negative logic ON/OFF control add the suffix RE.
- BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C. (Ground fixed and controlled environment)
- Heat sink is optional.
- The MWA100 meets level A & level B conducted emissions only with external components connected before the input pin to the converter.
- Maximum value at nominal input voltage and full load.
- Typical value at nominal input voltage and full load. The dual efficiency test condition: MWA100-48S5S33 @5V/12A and 3.3V/12A, MWA100-48S5S33 @5V/12A and 2.5V/16A, MWA100-48S5S33 @3.3V/18A and 2.5V/16A
- BASEPLATE GROUNDING: Base-plate should be grounded at one of the four screw bolts prior to operation.
- The converter is provided with basic insulation.





POLYTRON DEVICES, Inc.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.
 Tel: (973)345-5885 Fax: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com

Mechanical Specifications / Dual Output

(Continued)

PIN CONNECTION		
PIN	DEFINE	Diameter
1	-INPUT	0.04 Inches
2	CASE	0.04 Inches
3	CTRL	0.04 Inches
4	+INPUT	0.04 Inches
5	+V2	0.08 Inches
6	-V2 (COM)	0.08 Inches
7	V2 TRIM	0.04 Inches
8	+V1	0.08 Inches
9	-V1 (COM)	0.08 Inches
10	V1 TRIM	0.04 Inches

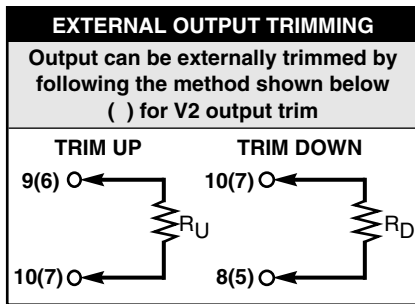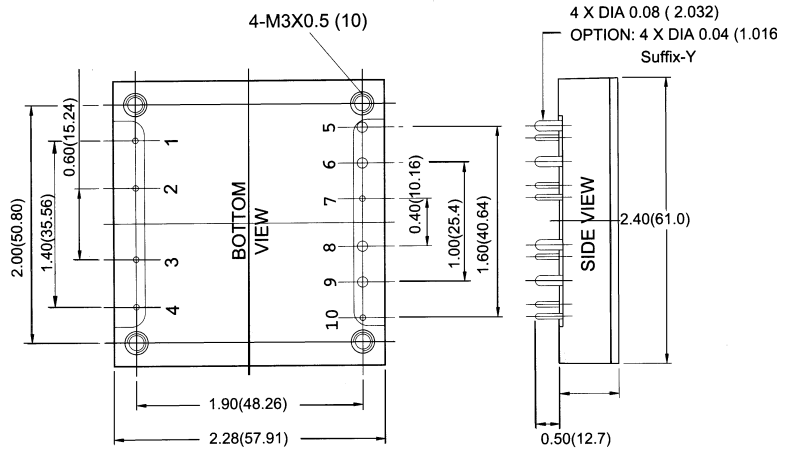

PIN 1,2,3,4,7,10. DIM. 0.04(1.016mm)
 PIN 6,8,9. DIM 0.08(2.032mm)
 Tolerance: x.xx±0.02(x.x±0.5)
 x.xxx±0.01(x.xx±0.25)
 Dimensions: inches(mm)
 Pin pitch tolerance ± 0.014(0.35)

1. All Dimensions are in inches (mm)



POLYTRON DEVICES, Inc.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.
 Tel: (973)345-5885 Fax: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com