




POLYTRON DEVICES, Inc.

# 100 WATT QUARTER BRICK

Regulated,  
2:1 Input Range  
DC/DC Converters

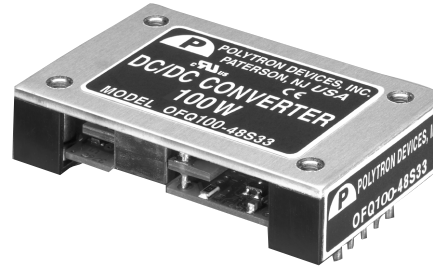

## FEATURES

- **UL and CE Approved**
- **Single Output Up to 30A**
- **No Minimum Load**
- **Adjustable Output Voltage**
- **High Efficiency (Up to 90%)**
- **Compact 2.28" x 1.45" x 0.50" Quarter Brick Package**

OFQ100 Series

## Specifications

Typical @ 25°C Under Full Load and Nominal Input Voltage, Unless Otherwise Specified.

### INPUT

Input Voltages 48Vdc .....	36-72 Vdc
Input Filter .....	L-C Type
Start Up Time .....	Nominal Vin and Constant Resistive Load
Power Up .....	25mS Typ
Remote ON/OFF .....	25mS Typ
Remote on/off (Note 3)	
(Negative Logic) DC-DC ON .....	Short or OV<Vr<1.2V
DC-DC Off .....	Open or 3.5V<Vr<15V
(Positive Logic) DC-DC ON .....	Open or 3.5V<Vr<15V
DC-DC Off .....	Short or OV<Vr<1.2V

### OUTPUT

Voltage Accuracy (FL and Nominal Vin) .....	±1.5%
Voltage Adjustability .....	±10%, -20%
Line Regulation (LL to HL at FL) .....	±0.2%
Load Regulation. (NL to FL) .....	1.8Vdc 5.4mV
.....	2.5Vdc 7.5mV, 3.3Vdc 10mV, 5Vdc 15mV
Ripple and Noise (20MHz BW) (Measured with a 1uF M/C & a 10uF/C) .....	100mVp-p
Temperature Coefficient (at FL) .....	±0.02%/°C, max
Transient Response, 25% load step change .....	200uS

### GENERAL

Efficiency .....	See Table
Isolation Voltage .....	1600Vdc, min.
Isolation Resistance .....	10 <sup>7</sup> Ohms, min.
Switching Frequency .....	270KHz, typ.
Protection Over Voltage Protection (Non-latching hiccup) .....	120% Vout max.
Over current protection threshold .....	110%-140%
Short circuit protection .....	hiccup, automatic recovery

### ENVIRONMENTAL

Operating Base Plate Temperature Range .....	-40° C to +100° C
Storage Temperature Range .....	-55° C to +125° C
Humidity, Max, Non-Condensing .....	95%

### PHYSICAL

Case Material .....	Aluminum base-plate
Weight .....	42g (1.46 oz.)
Dimensions .....	2.28" x 1.45" x 0.50" Package (57.9 X 36.83 X 12.7 mm)

### EMC CHARACTERISTICS

Conducted emissions	EN55022	Level A
	EN55022	Level B
Radiated emissions	EN55022	Level A
ESD	EN61000-4-2	Perf. Criteria2
Radiated immunity	EN61000-4-3	Perf. Criteria2
Fast transient	EN61000-4-4	Perf. Criteria2
Surge	EN61000-4-5	Perf. Criteria2
Conducted immunity	EN61000-4-6	Perf. Criteria2

### NOTE:

1. Maximum output deviation is 10% inclusive of trim. If remote sense is not being used, the +Vsense should be connected to its corresponding +OUTPUT and likewise the -sense should be connected to its corresponding -OUTPUT.
2. An external filter capacitor is required for normal operation. The capacitor should be capable of handling 1A ripple current for 48V models. Suggest: Nippon chemi-con KMF series, 220µ F/100V, ESR 90mΩ.
3. The negative / positive logic and pin length are optional (see table). The pin voltage is referenced to negative input.
4. Heat sink is optional.
5. The OFQ100 meets level A & level B conducted emissions only with external components connected before the input pin to the converter.
6. Typical value at nominal input voltage and full load.
7. BASEPLATE GROUNDING: Base-plate should be grounded at one of the four screw bolts prior to operation.
8. The converter is provided with basic insulation.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.

Tel: (973)345-5885 Fax: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com

Selection Guide


(Continued)

SINGLE OUTPUT VOLTAGE	Input Voltage Nominal (Range) (Vdc)	Output Voltage (Vdc)	Output Current (mA)	Efficiency %	Model Number	Case
	48 (36-72)	1.8	30A	85	OFQ100-48S1.8	○
	48 (36-72)	2.5	30A	87	OFQ100-48S2.5	○
	48 (36-72)	3.3	25A	89	OFQ100-48S3.3	○
	48 (36-72)	5	20A	90	OFQ100-48S5	○


Mechanical Specifications

PIN CONNECTIONS	
PIN NO.	Define
1	-INPUT
2	ON/OFF
3	+INPUT
4	-OUTPUT
5	-SENSE
6	TRIM
7	+SENSE
8	+OUTPUT

PIN 1, 2, 3, 5, 6, 7, DIM. 0.040 (1.016mm)  
 PIN 4, 8, DIM. 0.060 (1.57mm)  
 Tolerance: x.xx±0.02(x.x±0.5)  
 x.xxx±0.01(x.xx±0.25)

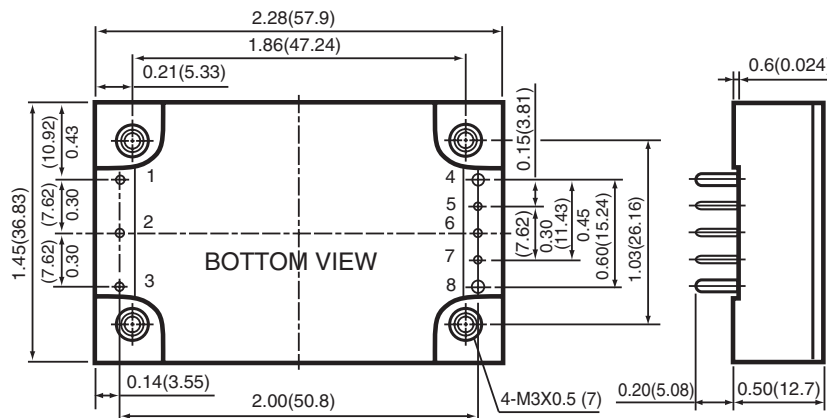

All Dimensions in inches (mm)  
 Pin Pitch tolerance ±0.014 (0.35)

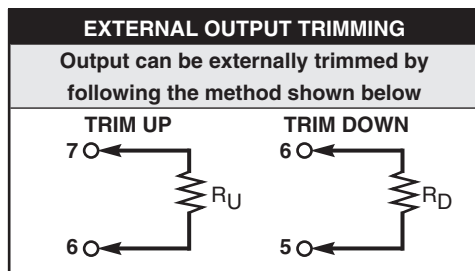

PRODUCT OPTIONS TABLE	
OPTION	SUFFIX
Negative remote ON/OFF logic, 0.20" pin length (standard)	-
Negative remote ON/OFF logic, 0.145" pin length	-L
Negative remote ON/OFF logic, 0.11" pin length	-K
Positive remote ON/OFF logic, 0.20" pin length	-P
Positive remote ON/OFF logic, 0.145" pin length	-S
Positive remote ON/OFF logic, 0.11" pin length	-M



POLYTRON DEVICES, Inc.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.  
 Tel: (973)345-5885 Fax: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com