



DC-DC CONVERTERS

REGULATED, 4:1 WIDE INPUT RANGE UP TO 15 WATTS

LOW PROFILE, SINGLE & DUAL OUTPUT

LPB15 SERIES

FEATURES

- 4:1 Ultra Wide Input Voltage Range
- No Minimum Load Required
- High Efficiency Up to 92%
- Extra Small Low Profile Package: 1.0" × 1.0" × 0.39"
- Six Sided Continuous Shield
- Safety Meets UL60950-1, EN60950-1 and IEC60950-1
- CE Mark
- Compliant to RoHS & Reach

SELECTION GUIDE

All specifications are typical at nominal input, full load and 25°C, unless otherwise noted.

Input Voltage Range Vdc	Output Voltage Vdc	Output Current at Full Load mA	Input Current at No Load mA	Efficiency %	Model Number	Maximum Capacitor Load ⁽¹⁾ μF
9 - 36	3.3	4000	45	86	LPB15-24S33	12000
9 - 36	5	3000	70	86	LPB15-24S5	6000
9 - 36	12	1300	20	87	LPB15-24S12	1000
9 - 36	15	1000	20	87	LPB15-24S15	660
18 - 75	3.3	4000	25	86	LPB15-48S33	12000
18 - 75	5	3000	35	87	LPB15-48S5	6000
18 - 75	12	1300	12	87	LPB15-48S12	1000
18 - 75	15	1000	12	87	LPB15-48S15	660
9 - 36	±5	±1500	20	85	LPB15-24-5	±3000
9 - 36	±12	±625	20	87	LPB15-24-12	±520
9 - 36	±15	±500	20	88	LPB15-24-15	±330
18 - 75	±5	±1500	12	85	LPB15-48-5	±3000
18 - 75	±12	±625	15	86	LPB15-48-12	±520
18 - 75	±15	±500	20	87	LPB15-48-15	±330

*Use Suffix after Model Number:

- Standard Negative logic remote ON/OFF
- Suffix "A" Positive logic remote ON/OFF
- Suffix "B" Without Ctrl pin
- Suffix "C" Negative Logic Remote ON/OFF without trim pin
- Suffix "D" Without Control and Trim Pin
- Suffix "E" Positive logic remote ON/OFF without Trim pin
- Suffix "HS" Heat Sink
- Suffix "HC" Heat Sink with clamp

LPB15 SERIES

Input Specifications			Output Specifications			
Operating input voltage range, Vdc	9 Min., 24 Typ., 36 Max.	24Vin(nom)	Voltage accuracy, %	-1.0 Min., +1.0 Max		
	18 Min., 48 Typ., 75 Max.	48Vin(nom)		Line regulation, %	Low Line to High Line at Full Load	
Start up voltage, Vdc	9 Max.	24Vin(nom)	-0.2 Min., +0.2 Max.		Single	
	18 Max.	48Vin(nom)	-0.5 Min., +0.5 Max.	Dual		
Shutdown voltage, Vdc	8 Typ.	24Vin(nom)	Load regulation, %	-0.2 Min., +0.2 Max. No Load to Full Load, Single		
	16 Typ.	48Vin(nom)		-1.0 Min., +1.0 Max. No Load to Full Load, Dual		
Start up time, ms	Constant resistive load		Cross regulation, %	-5.0 Min., +5.0 Max. Asymmetrical load 25%/100%FL, Dual		
	30 Max.	Power up		Voltage and adjustability ⁽²⁾ , %	-10 Min., +10 Max. Single Output	
Input surge voltage, Vdc	100ms, max.		Ripple and noise, mVp-p		Measured by 20MHz bandwidth; With a 1µF/25V M/C X7R and a 10µF T/C	
	50 Max.	24Vin(nom)		75 Typ.	Single, 3.3Vout, 5Vout	
	100 Max.	48Vin(nom)		100 Typ.	Others	
Input reflected ripple current, mA _{p-p}	30 Typ.	Nominal input and Full load	100 Typ.	Dual, All		
Input filter	Pi type		Temperature coefficient, %/°C	-0.02 Min., -0.02 Max.		
Remote ON/OFF	Referred to -Vin pin			Transient response recovery time, µs	250 Typ. 25% load step change	
	Open or 3 - 15 Vdc	Positive logic, DC-DC ON	Over voltage protection, Vdc		3.7 Min., 5.4 Max. 3.3Vout	
	Short or 0 - 1.2 Vdc	(Option), DC-DC OFF		5.6 Min., 7.0 Max. 5Vout		
	Short or 0 - 1.2 Vdc	Negative logic, DC-DC ON		13.5 Min., 19.6 Max. 12Vout		
	Open or 3 - 15 Vdc	(Standard), DC-DC OFF		16.8 Min., 20.5 Max. 15Vout		
	-0.5 Min., 1 Max., mA	Input current of Ctrl pin	Over load protection, %	150 Typ. % of lout rated; Hiccup mode		
	2.5 mA Typ.	Remote off input current		Short circuit protection	Continuous, automatics recovery	

General Specifications

Isolation voltage, Vdc	1 minute	Input to Output	1600 Min.		
	1 minute	Input (Output) to Case	1000 Min.		
Isolation resistance, GΩ	500Vdc		1 Min.		
Isolation capacitance, pF					1000 Max.
Switching frequency, kHz			360 Min.	400 Typ.	440 Max.

Environmental Specifications

Operating ambient temperature, °C	Without derating	-40 Min.	+60 Max.	
	With derating	+60 Min.	+105 Max.	
Maximum case temperature, °C			+105 Max.	
Storage temperature range, °C			-55 Min.	+125 Max.
Thermal impedance, °C/W	Vertical direction by natural convection (20LFM)			
	Without heat-sink		+18.2 Typ.	
Thermal shock	With heat-sink		+15.8 Typ.	
Thermal shock			MIL-STD-810F	
Vibration			MIL-STD-810F	
Relative humidity			5% to 95% RH	

LPB15 SERIES


Physical Specifications		EMC Specifications			
Design meet safety standard	UL60950-1, EN60950-1, IEC60950-1	Specifications	Conditions	Level	
Case material	Nickel-coated copper	EMI ⁽³⁾	EN55022	Class A	
Base material	FR4 PCB			Class B	
Potting material	Epoxy (UL94 V-0)	ESD	EN61000-4-2	Air ±8kV and Contact ±6kV	Perf. Criteria A
Weight	15g (0.53oz)	Radiated immunity	EN61000-4-3	10V/m	Perf. Criteria A
MTBF	1.459×10 ⁶ hrs, MIL-HDBK-217F, Full load	Fast transient ⁽⁴⁾	EN61000-4-4	±2kV	Perf. Criteria A
		Surge ⁽⁴⁾	EN61000-4-5	±1kV	Perf. Criteria A
		Conducted immunity	EN61000-4-6	3Vr.m.s	Perf. Criteria A

Note:


1. Test by minimum input and constant resistive load.
2. Trimming allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Vout pin or the -Vout pin.
3. The standard modules meet EN55022 Class A and Class B with external components. For further information, please contact Polytron Devices.
4. An external input filter capacitor is required if the module has to meet EN6100-4-4. EN61000-4-5. Recommended 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220µF/100V) to connect in parallel.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


Characteristic Curve

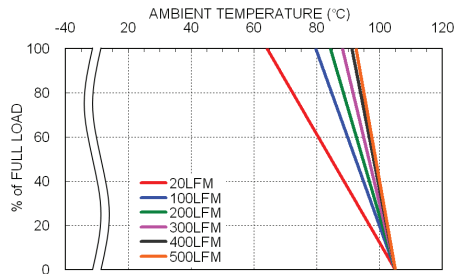


LPB15-48S5 Derating Curve

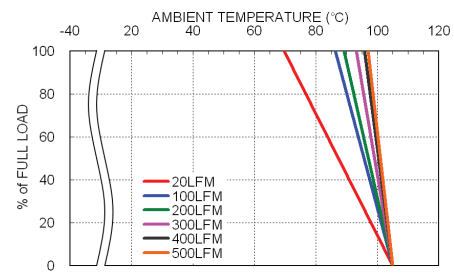

LPB15-48S5 Derating Curve With Heat-sink

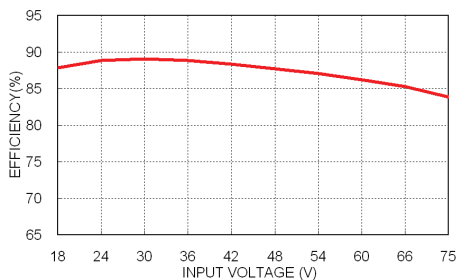


LPB15-48S5 Efficiency vs. Input Voltage

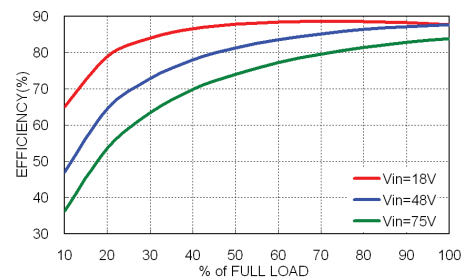

LPB15-48S5 Efficiency vs. Output Load

LPB15 SERIES

Mechanical Drawing

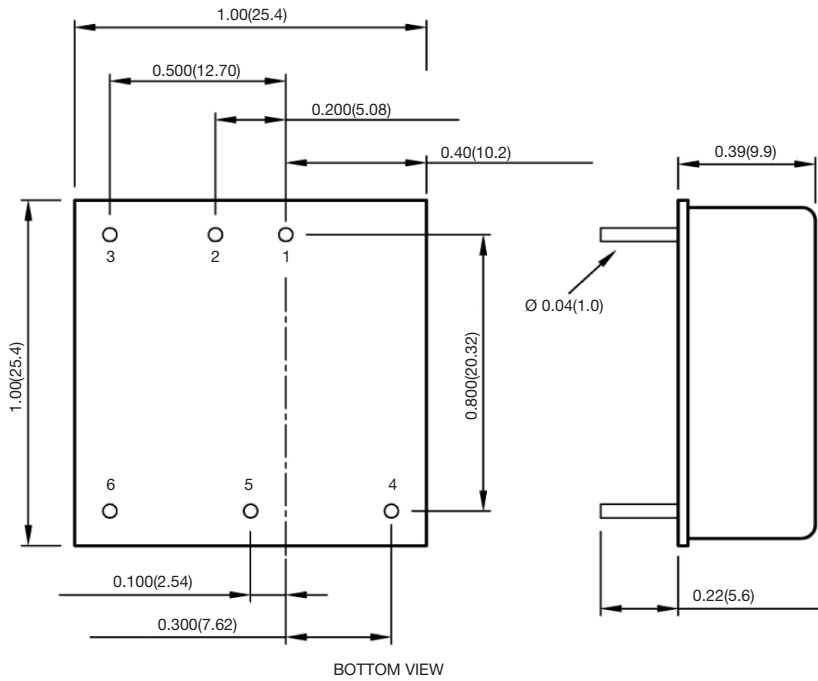


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.



1. All dimensions in inch (mm)
2. Tolerance: $x.xx \pm 0.02$ ($x.x \pm 0.5$) $x.xxx \pm 0.01$ ($x.xx \pm 0.25$)
3. Pin pitch tolerance ± 0.01 (0.25)
4. Pin dimension tolerance ± 0.004 (0.1)