



8 WATT SINGLE & DUAL OUTPUT

Regulated 24 Pin DIP Package
Isolated, 2:1 Input
DC/DC Converters



FEATURES

- 8 Watts in DIL Package
- 3.3 Vdc Output
- 80% Typical Efficiency
- Regulated Outputs
- No Derating to 70°C
- 1500 Vdc Min.
Input/Output Isolation
- 5-Sided EMI Shield

TWA8 Series

Specifications

All specifications are typical at nominal input, full load, and 25°C , unless otherwise noted.

INPUT

Input Voltages.....	Voltage Range
12 Vdc.....	9-18 Vdc
24 Vdc.....	18-36 Vdc
48 Vdc.....	36-72 Vdc
Input Filter.....	Pi Network

OUTPUT

Voltage Accuracy.....	±2% max.
Line Regulation	
Single Output.....	±0.2% max.
Dual Output.....	±0.2% max.
Load Regulation	
Single Output.....	±0.2% max.
Dual Output.....	±1% max.
Ripple Noise (20 MHz BW).....	50mVp-p
Temperature Coefficient (at FL).....	±0.02%/°C max.

REMOTE ON/OFF CONTROL

Control Voltage Referenced To Negative (-) Input	
Compatibility.....	CMOS, TTL
On Control.....	4.8V min. on open
Off Control.....	1.8V max. on short

GENERAL

Efficiency.....	80-85% nominal line @ FL
Isolation Voltage.....	1500 Vdc min.
Isolation Resistance.....	1000MOhms
Isolation Capacitance.....	300 pF max.
Switching Frequency.....	300KHz min.

ENVIRONMENTAL

Operating Temperature Range.....	-25 to +71°C
Storage Temperature Range.....	-55 to +125°C
Cooling Free.....	Air Convection
EMI/RFI.....	Five-Sided Shield

PHYSICAL

Case Material.....	Non-Conductive Nickel-Coated Copper with Non-Conductive Base
Dimensions.....	1.25" x 0.80" x 0.40" (31.8 x 20.3 x 10.2 mm)


Selection Guide

(Continued)

	Input Voltage Nominal (Range) (Vdc)	Output Voltage (Vdc)	Output Current (mA)	Efficiency %	Model Number
SINGLE OUTPUT VOLTAGE	12 (9-18)	3.3	2000	80	TWA8-12S3.3
		5	1500	82	TWA8-12S5
		12	666	83	TWA8-12S12
		15	533	83	TWA8-12S15
	24 (18-36)	3.3	2000	81	TWA8-24S3.3
		5	1500	82	TWA8-24S5
		12	666	83	TWA8-24S12
		15	533	83	TWA8-24S15
	48 (36-72)	3.3	2000	81	TWA8-48S3.3
		5	1500	83	TWA8-48S5
		12	666	84	TWA8-48S12
		15	533	84	TWA8-48S15
DUAL OUTPUTS	12 (9-18)	±5	±800	83	TWA8-12-5
		±12	±333	84	TWA8-12-12
		±15	±267	84	TWA8-12-15
	24 (18-36)	±5	±800	83	TWA8-24-5
		±12	±333	84	TWA8-24-12
		±15	±267	84	TWA8-24-15
	48 (36-72)	±5	±800	84	TWA8-48-5
		±12	±333	85	TWA8-48-12
		±15	±267	85	TWA8-48-15

Mechanical Specifications

I/O Connections		
Pin	SINGLE	DUAL
1	ON/OFF	ON/OFF
2	-Vin	-Vin
3	-Vin	-Vin
9	N/C	Common
11	N/C	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

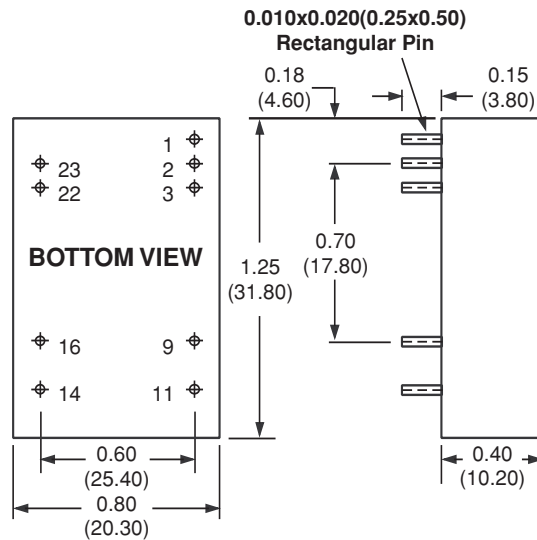

All Dimensions are in inches (mm)



POLYTRON DEVICES, Inc.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.
 Tel: (973)345-5885 Fax: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com