




# 12 WATT Single & Dual Output

Regulated, 24 Pin DIP Package  
Isolated, 4:1 Input  
DC/DC Converters

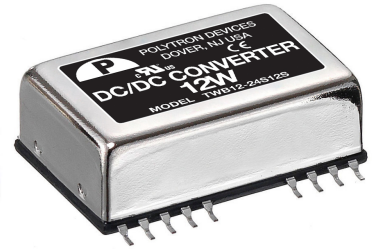

## FEATURES

- **Ultra Wide (4:1) Input Voltage Range**
- **12 Watts in DIL Package**
- **SMD Package Optional (Suffix "S")**
- **Standard 1.25" X 0.80" X 0.40"**
- **88% Typical Efficiency**
- **1600 Vdc Min.**
- **Input/Output Isolation**
- **Five-Sided Continuous EMI Shield**
- **UL6095-1, EN 60950-1, IEC 60950-1**
- **Compliant to RoHS EU Directive**

TWB12 Series

## Specifications

### INPUT

Voltage Range	24VDC nominal input.....9 -36VDC
	48VDC nominal input.....18 -75VDC
Input filter	.....Pi Filter
Input Surge Voltage	24VDC input.....50VDC 100ms, max.
	48VDC input.....100VDC 100ms, max.
Input Reflected Ripple Current	.....20mA <sub>p-p</sub>

Start up Time	Normal input and constant resistive load	Power up.....450ms
---------------	------------------------------------------	--------------------

Startup Voltage	24VDC input.....9VDC, max.
	48VDC input.....18VDC, max.

Shutdown Voltage	24VDC input .....8VDC
	48VDC input .....16VDC

Remote ON/OFF (Note 5)	DC-DC ON.....Open or 3V < Vr < 12V
	DC-DC OFF.....Short or 0V < Vr < 1.2V

Input Current of Remote Control Pin.	Nominal input.....-0.5mA-0.5mA
Remote off state input current.....	Nominal input.....2.5mA

### OUTPUT

Output Power.....	.....12 Watts max.
Voltage Accuracy	.....±1.2%
Minimum Load....	.....0%
Line Regulation	.....LL to HL at Full Load.....±0.2%

Load Regulation	.....No Load to Full Load.....	.....Single (DIP).....±0.5%	.....Single (SMD).....±1.0%	.....Dual (SMD, DIP).....±1.0%
-----------------	--------------------------------	-----------------------------	-----------------------------	--------------------------------

Cross Regulation Asymmetrical Load 25% / 100% FL..	.....±5%
Ripple and Noise.....	20MHz band width.....See table
Temperature Coefficient..	.....±0.2% / °C, max.
Transient Response recovery Time	.....25% load step change.....250µS

Over voltage protection	.....3.3 VDC output..	.....3.9VDC
(only single)	.....5.1VDC output.....	.....6.2VDC
	.....12VDC output.....	.....15VDC
	.....15VDC output.....	.....18VDC

Overload Protection.....	% of FL at nominal input.....150%
Short Circuit Protection.....	.....Continuous, automatic recovery

Additional specifications on next page.



**GENERAL**

Efficiency.....See table

Isolation Voltage Input to Output .....1600Vdc, min. 1 minute  
 Input (Output) to Case.....DIP.....1600Vdc, min. 1 minute  
 .....SMD.....1000Vdc, min. 1 minute

Isolation Resistance .....500VDC.....10<sup>9</sup>ohms, min.

Isolation Capacitance .....1500pF, max.

Switching Frequency .....400kHz±10%

Approvals and Standard .....IEC60950-1, UL60950-1, EN60950-1

Case Material .....Nickel Coated Copper

Base Material .....Non-conductive black plastic

Potting Material .....Epoxy (UL94-V0)

Dimensions .....1.25 x 0.80 x 0.40 inches  
 (31.8 x 20.3 x 10.2 mm)

Weight .....18g (0.62 oz.)

MTBF (Note 1) .....BELLCORE TR-NWT-000332.....2.350 x 10<sup>6</sup> hrs  
 .....MIL-HDBK-217F.....8.745 x 10<sup>5</sup> hrs

**ENVIRONMENTAL**

Operating Ambient Temperature (Note 6) Vo:5V, 12V, 15V -40°C - +69°C (without derating)  
 ±12V, ±15V +69°C - +105°C (with derating)  
 Vo:3.3V, ±5V -40°C - +61°C (without derating)  
 +61°C - +105°C (with derating)

Maximum Case Temperature.....+105°C

Storage Temperature Range.....-55°C - +125°C

Thermal Impedance (Note 8) .....Natural Convection.....20°C/Watt

Thermal Shock.....MIL-STD-810F

Vibration.....MIL-STD-810F

Relative Humidity.....5% to 95% RH

**EMC CHARACTERISTICS**

EMI (Note 6)..... EN55022, EN55011 .....Class A, Class B

ESD.....EN61000-4-2 Air.....±8KV .....Perf. Criteria A  
 Contact.....±6KV

Radiated Immunity..... EN61000-4-3 .....10 V/m .....Perf. Criteria A

Fast Transient (Note 7)..... EN61000-4-4 .....±2KV.....Perf. Criteria A

Surge (Note 7)..... EN61000-4-5 .....±1KV.....Perf. Criteria A

Conducted Immunity..... EN61000-4-6 .....10Vr.m.s.....Perf. Criteria A

**SELECTION GUIDE**

	Input Voltage Nominal (Range) (Vdc)	Output Voltage (Vdc)	Output Current (mA)	Output Ripple & Noise	Input Current		Efficiency (%) <sup>(3)</sup>	Model Number*	Capacitor Load max. <sup>(4)</sup>
					No load <sup>(2)</sup> (mA)	Full load (mA)			
<b>SINGLE OUTPUT VOLTAGE</b>	24 (9-36)	3.3	3500	85m Vp-p	55	602	84	TWB12-24S3.3	2000µF
	24 (9-36)	5.1	2400	85m Vp-p	55	614	87	TWB12-24S5	2000µF
	24 (9-36)	12	1000	85m Vp-p	13	602	87	TWB12-24S12	430µF
	24 (9-36)	15	800	85m Vp-p	11	602	87	TWB12-24S15	300µF
	48 (20-72)	3.3	3500	85m Vp-p	17	301	84	TWB12-48S3.3	2000µF
	48 (20-72)	5.1	2400	85m Vp-p	20	307	87	TWB12-48S5	2000µF
	48 (20-72)	12	1000	85m Vp-p	6	302	87	TWB12-48S12	430µF
	48 (20-72)	15	800	85m Vp-p	6	298	84	TWB12-48S15	300µF
<b>DUAL OUTPUT VOLTAGE</b>	24 (9-36)	±5	±1200	85m Vp-p	15	625	84	TWB12-24-5	+/-1250µF
	24 (9-36)	±12	±500	85m Vp-p	12	602	87	TWB12-24-12	+/-200µF
	24 (9-36)	±15	±400	85m Vp-p	20	602	88	TWB12-24-15	+/-120µF
	48 (20-72)	±5	±1200	85m Vp-p	7	309	85	TWB12-48-5	+/-1250µF
	48 (20-72)	±12	±500	85m Vp-p	7	301	87	TWB12-48-12	+/-200 µF
	48 (20-72)	±15	±400	85m Vp-p	7	301	87	TWB12-48-15	+/-120µF

**NOTES:**

- Bellcore TR-NWT-00032, Case: 1:50% Stress, Temperature at 40°C.  
 MIL-STD-217F Notice 2 @ Ta = 25°C, Full load (Ground, Benign, controlled environment).
- Maximum value at normal input voltage and full load.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistive load.
- The ON/OFF control pin voltage is referenced to -Vin.
- The TWB12 series can meet EN55022 Class A with parallel an external capacitor to the input pins.  
 Recommend: 24 Vin : C1=1 µF/50V 1210 MLCC.  
 48 Vin : C1=0.47 µF/100V 1812 MLCC.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
 The filter capacitor Polytron Devices suggests: Nippon chemi-con KY series, 220µ F/100V, ESR0

**\*For SMD package, use suffix "S" after model number.**



See next page for Mechanical Specifications.




**POLYTRON DEVICES, Inc.**

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.

Tel: (973)345-5885 FAX: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com

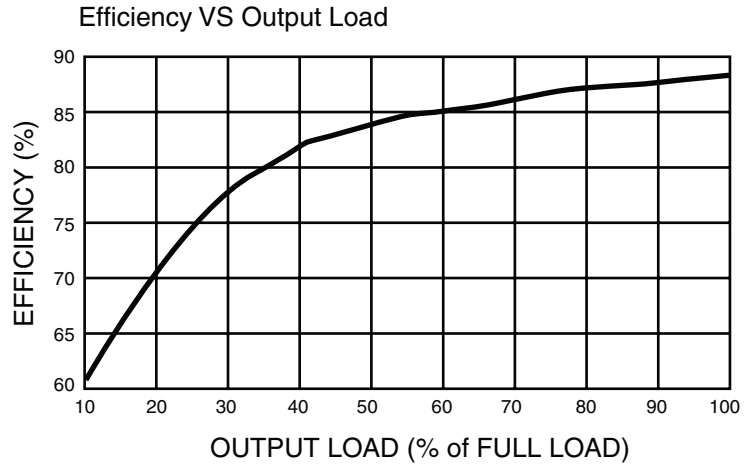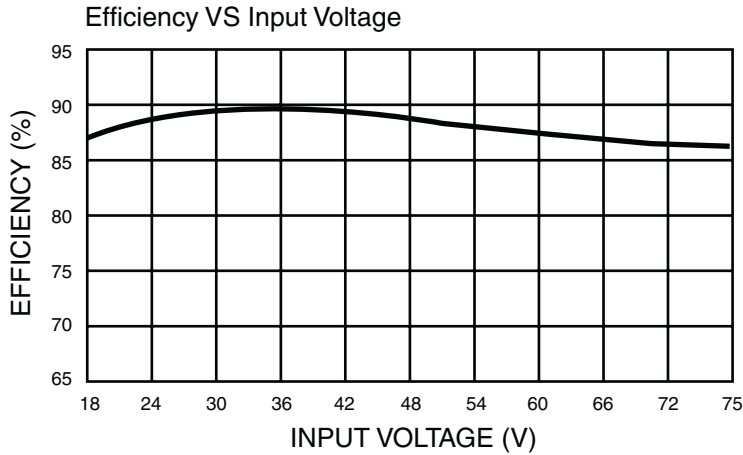

### Mechanical Drawings

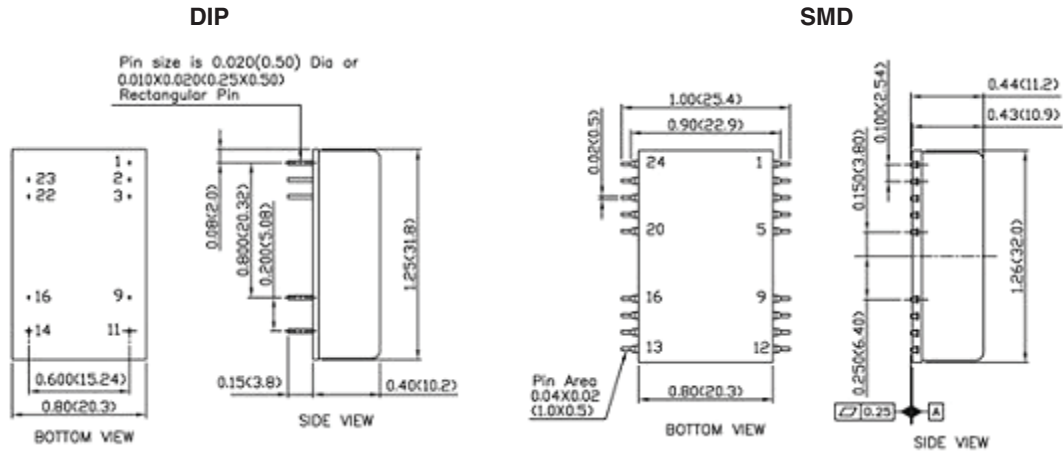

1. All dimensions in inches (mm)  
Tolerance: x.xx±0.02(x.x±0.5)  
          x.xxx±0.01(x.xx±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004(0.1)

PIN CONNECTION - DIP		
PIN	SINGLE	DUAL
1	CTRL	CTRL
2	-INPUT	-INPUT
3	-INPUT	-INPUT
9	NC	COMMON
11	NC	-OUTPUT
14	+OUTPUT	+OUTPUT
16	-OUTPUT	COMMON
22	+INPUT	+INPUT
23	+INPUT	+INPUT


PIN CONNECTION - SMD		
PIN	SINGLE	DUAL
1	CTRL	CTRL
2	-INPUT	-INPUT
3	-INPUT	-INPUT
9	NC	COMMON
11	NC	-OUTPUT
14	+OUTPUT	+OUTPUT
16	-OUTPUT	COMMON
22	+INPUT	+INPUT
23	+INPUT	+INPUT
Others	NC	NC



### POLYTRON DEVICES, Inc.


Recommended Pad Layout

DIP type

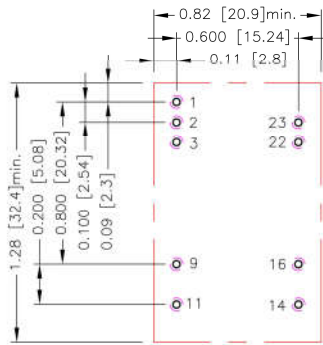

All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1.2.3.9.11.14.16.22.23:  $\Phi 0.031[0.80]$   
 Top view pad 1.2.3.9.11.14.16.22.23:  $\Phi 0.039[1.00]$   
 Bottom view pad 1.2.3.9.11.14.16.22.23:  $\Phi 0.063[1.60]$

SMD type

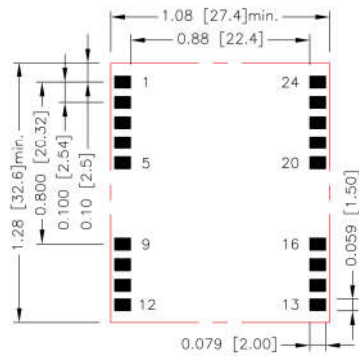

All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Top view pad:  $0.079 \times 0.059 [2.00 \times 1.50]$



**POLYTRON DEVICES, Inc.**

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.

Tel: (973)345-5885 FAX: (973)345-1264 • Email: [sales@polytrondevices.com](mailto:sales@polytrondevices.com) • [www.polytrondevices.com](http://www.polytrondevices.com)